Small & medium capacity air pump

XP-40/60/80



Pressure type

Dust control "Dust trap filter"


Easy restart by micro swith (XP-60 / 80 only)

No need of grounding
Outdoor (Rainproof) use

Applications


- Septic tank (biological contact aeration)
- · Air injection for bubble bath
- · Small capacity compressor

Dimensions

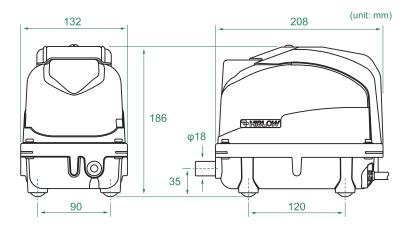

Specifications

		XP-40		XP-60		XP-80	
Rated voltage	٧	AC100 / 120 / 230					
Power frequency	Hz	50	60	50	60	50 6	0
Rated pressure	kPa	12.8		14.7			
Airflow volume	L/min	40		60		80	
Power consumption	W	30		39		58	
Sound level	dBA	33		35		36	
Weight	kg	4.1		4.3			

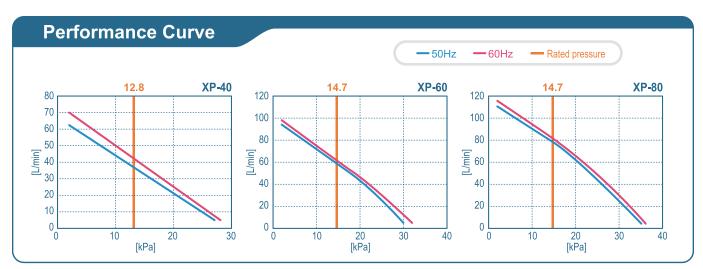

- * All characteristics values are only for reference, and are not guaranteed values.
- * Note that the operating temperature for our pumps is 41°F(5°C) to 104°F(40°C).